



NOTES:

Current Rating: 0.5AMP
 Contact Resistance: 35mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 500MΩ Min
 Operation Temperature: -65°C to +125°C

Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PBT+30%G.F UL94V-0

Ordering Information





6322D-XXX S I XX PN A 02

No. of Pins
 26 50
 34 60
 40 68

Contact Plating
 S1=3u"Gold/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin

Packing
 A=Tray
 T=Tube

Item	Pitch	Mating
Standard	1.27	6320D
Alternate		

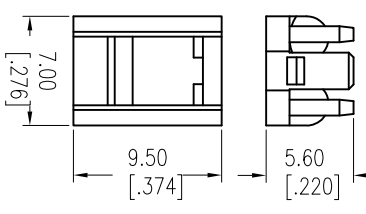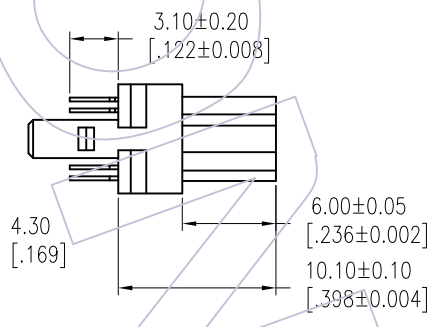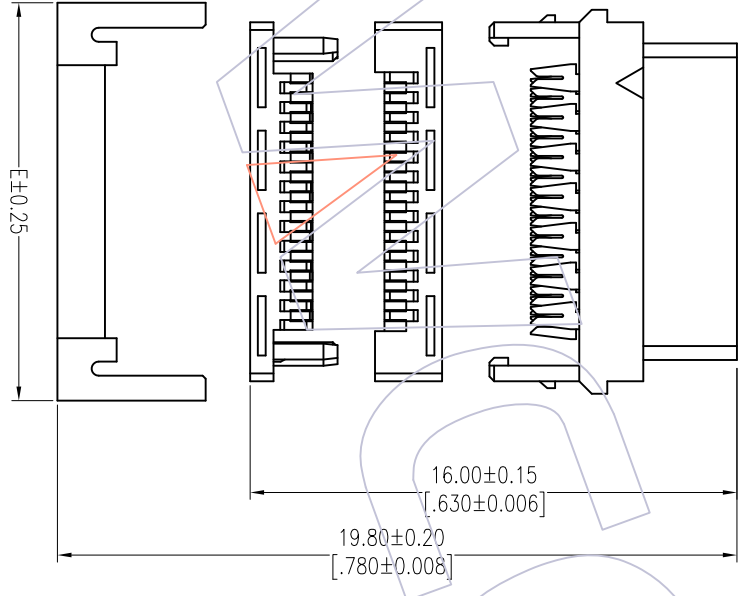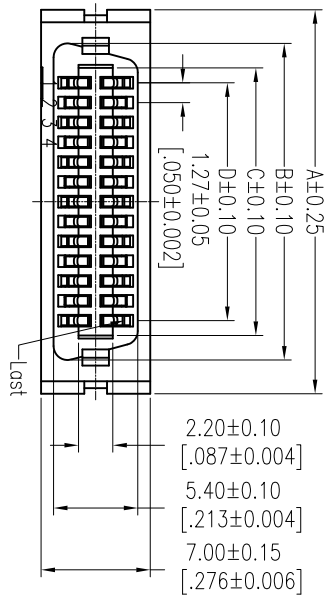

No. of Pins	Dimension				
	A	B	C	D	E
26	24.60	20.29	17.14	15.24	25.49
34	29.68	25.37	22.22	20.32	30.57
40	33.49	29.18	26.03	24.13	34.38
50	39.84	35.53	32.38	30.48	40.73
60	46.19	41.88	38.73	36.83	47.08
68	51.27	46.96	43.81	41.91	52.16

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
XX	JYHuang	2015/12/08	mm		6322D-XXXS1XXPN02
CHECK	CHECK	DATE	UNIT		TITLE:
XX.XXX ±0.25			A4		1.27mm SCSI SOCKET IDC TYPE
Angle ± 3'	APPROVE	DATE	SHEET 1/1		CEN-TYPE, FOUR PARTS (W/O BLMP)
Angle DIM TOL	CHANGE		PROJ.		Customer NO.
MODIFICATION DESCRIPTION					
REV	DATE				
A0	2015/12/08	NEW			



Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com